


Removing the Patio door panel

Removing the panels:

1. Before you begin, please examine the sealed units carefully to make sure they are not damaged and measure them to make sure they are the right size.
2. Remove the operating panel:
 - Open operating half way.
 - Left panel up into the head track.
 - Pull out on the bottom of the sash to clear the bottom track. (Figure 2.)
3. The fixed sash is screwed in place and can not be removed.

Please note: This sash will be heavy and two people should be used to remove it.

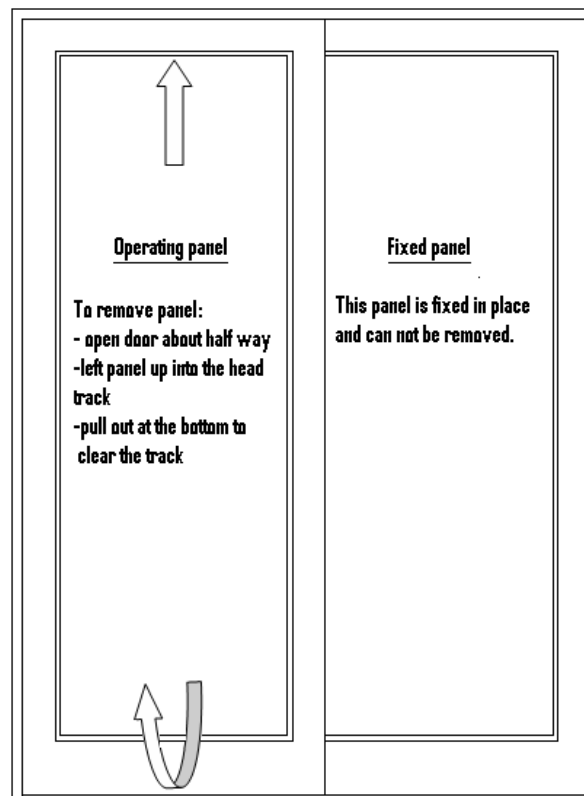

NORWOOD

NEVER ORDINARY

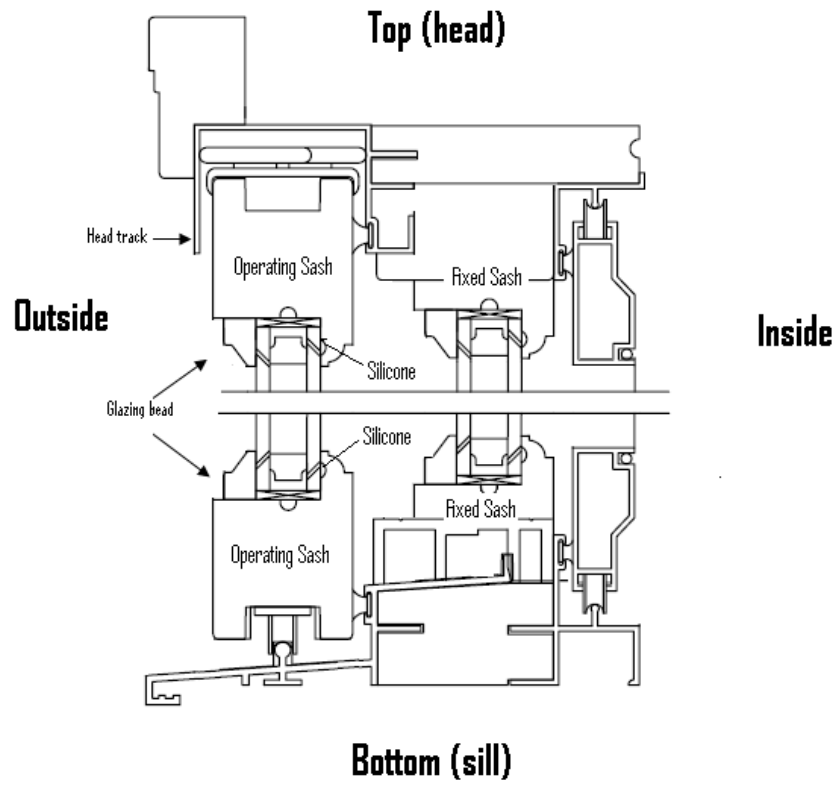


Figure 2