Double French Inswing Casement Egress Chart

NORWOOD
WINDOWS & DOORS

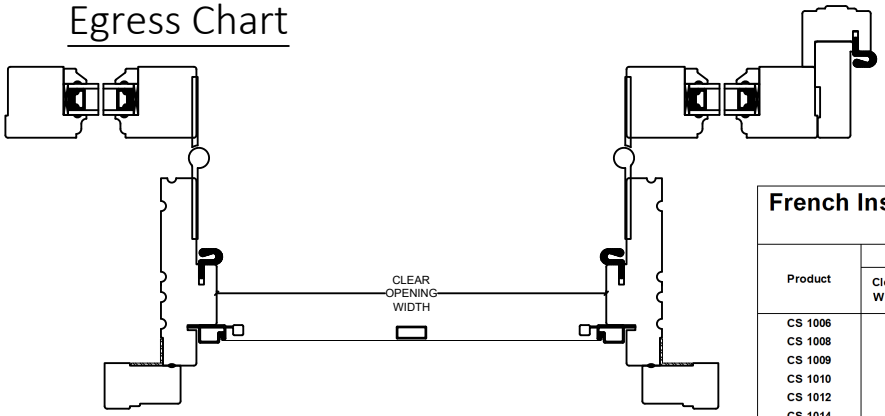

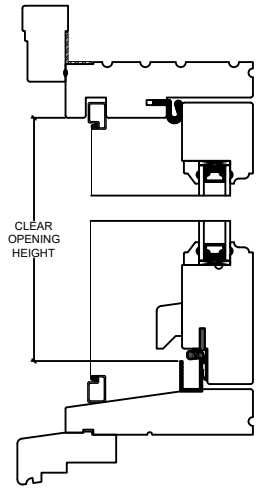

French Inswing Casement Egress Chart

Product	EGRESS OPENING - Double Units		
	Clear Opening Width (inches)	Clear Opening Height (inches)	Vent Opening (FT^2)
CS 1006	33.00	20.375	4.7
CS 1008	33.00	28.25	6.5
CS 1009	33.00	32.188	7.4
CS 1010	33.00	36.125	8.3
CS 1012	33.00	44.000	10.1
CS 1014	33.00	51.875	11.9
CS 1015	33.00	55.813	12.8
CS 1016	33.00	59.75	13.7
CS 1018	33.00	67.625	15.5
CS 1206	40.875	20.375	5.8
CS 1208	40.875	28.25	8.0
CS 1209	40.875	32.188	9.1
CS 1210	40.875	36.125	10.3
CS 1212	40.875	44.000	12.5
CS 1214	40.875	51.875	14.7
CS 1215	40.875	55.813	15.8
CS 1216	40.875	59.75	17.0
CS 1218	40.875	67.625	19.2

Canadian Egress:

- In accordance with the National Building Code of Canada
- Requirements:
  - A. Minimum **3.8 FT^2** (0.35m^2) of clear opening.
  - B. Minimum **15 inches** (380mm) of clear opening width.
  - C. Minimum **15 inches** (380mm) of clear opening height.

USA Egress:

- In accordance with the International Building Codes
- Requirements:
  - A. Minimum **5.7 FT^2** (0.53m^2) of clear opening.
  - B. Minimum **20 inches** (508mm) of clear opening width.
  - C. Minimum **24 inches** (610mm) of clear opening height.

Egress codes may vary. Always verify with your code provider.

French Inswing Casement Egress Chart

Product	EGRESS OPENING - Double Units		
	Clear Opening Width (inches)	Clear Opening Height (inches)	Vent Opening (FT^2)
CS 1406	48.75	20.375	6.9
CS 1408	48.75	28.25	9.6
CS 1409	48.75	32.188	10.9
CS 1410	48.75	36.125	12.2
CS 1412	48.75	44.000	14.9
CS 1414	48.75	51.875	17.6
CS 1415	48.75	55.813	18.9
CS 1416	48.75	59.75	20.2
CS 1418	48.75	67.625	22.9
CS 1606	56.63	20.375	8.0
CS 1608	56.63	28.25	11.1
CS 1609	56.63	32.188	12.7
CS 1610	56.63	36.125	14.2
CS 1612	56.63	44.000	17.3
CS 1614	56.63	51.875	20.4
CS 1615	56.63	55.813	21.9
CS 1616	56.63	59.75	23.5
CS 1618	56.63	67.625	26.6
CS 1806	64.5	20.375	9.1
CS 1808	64.5	28.25	12.7
CS 1809	64.5	32.188	14.4
CS 1810	64.5	36.125	16.2
CS 1812	64.5	44.000	19.7
CS 1814	64.5	51.875	23.2
CS 1815	64.5	55.813	25.0
CS 1816	64.5	59.75	26.8
CS 1818	64.5	67.625	30.3